


# Garfield



Model 1400

**Direct response system on raise and lower cylinder instead of old style double knuckle system**

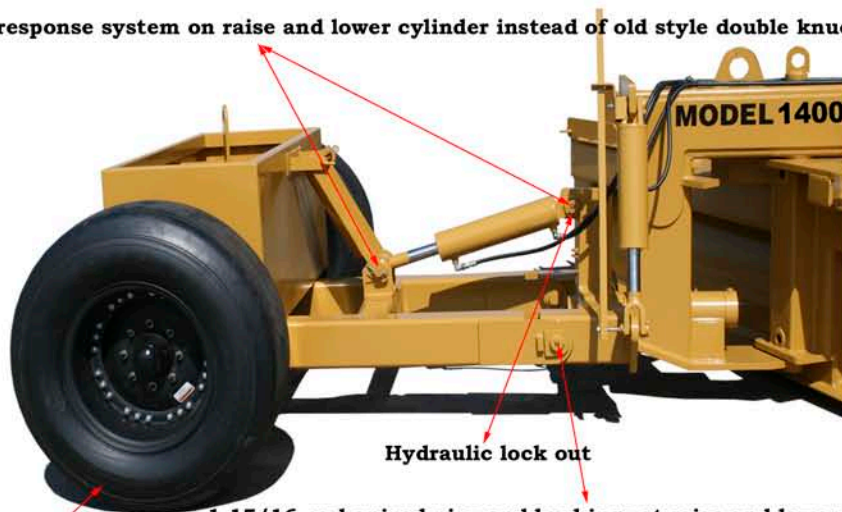


**26 ply tires**

**1-15/16 carbonized pins and bushings at raise and lower pivot points**

**Reinforcement plates are 1/2 inch vs. 3/8 inch**

**Cylinder pins are 1-1/2 inch grease able carbonized pins and bushings instead of standard 1 inch cylinder pins**

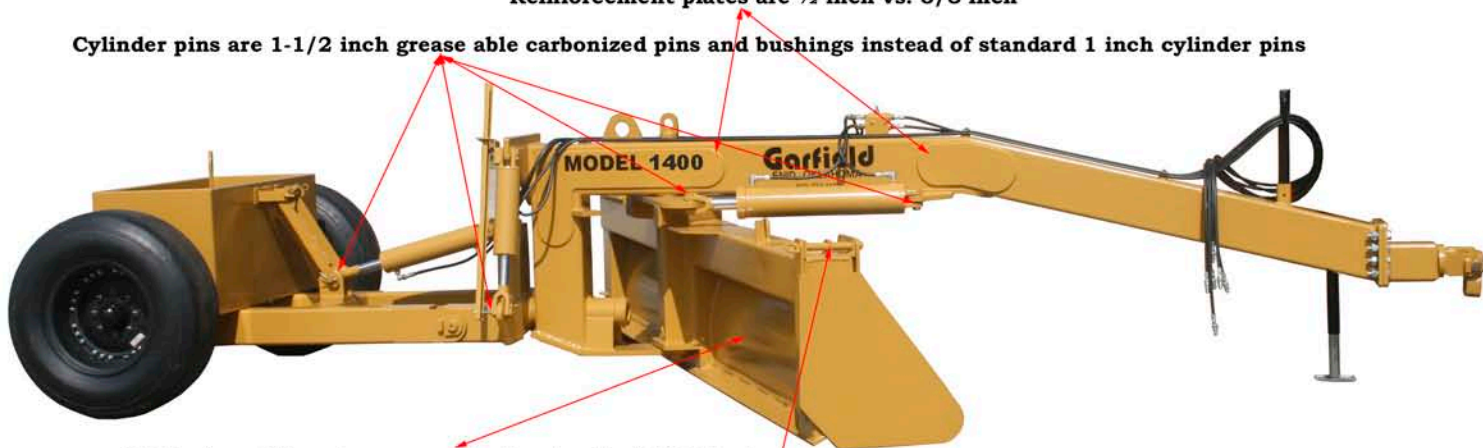

**3/8 inch moldboard compared to the standard 5/16 inch**

**Heavy duty locking bracket for side plates**



**Formed moldboard that fits the contour of the blade**

**Height adjustable swivel hitch**

**Reversible blade**