

GARFIELD




Model 1200

Garfield

Earth Moving Equipment

Grader Blade


Direct response system on raise and lower cylinder instead of old style double knuckle system

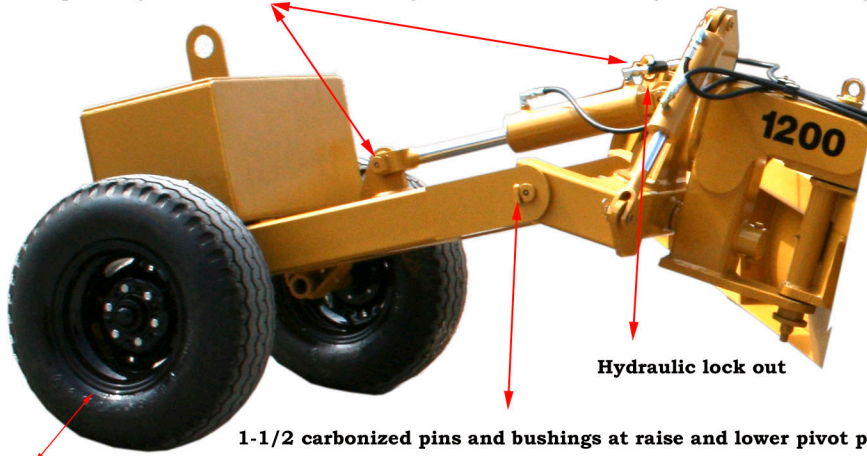

10 ply tires


Reinforcement plates are 3/8 inch

Cylinder pins and bushings are carbonized and greaseable.

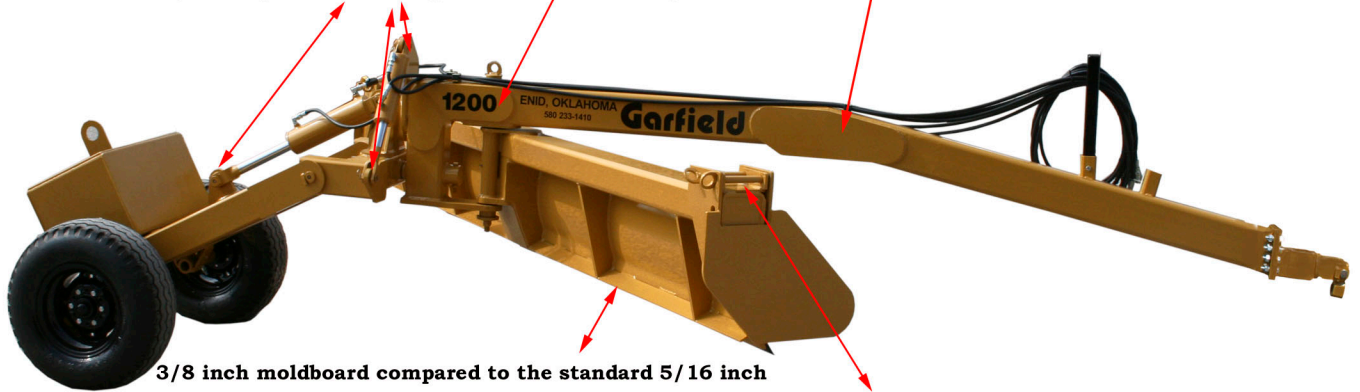

3/8 inch moldboard compared to the standard 5/16 inch

Heavy duty locking bracket for side plates

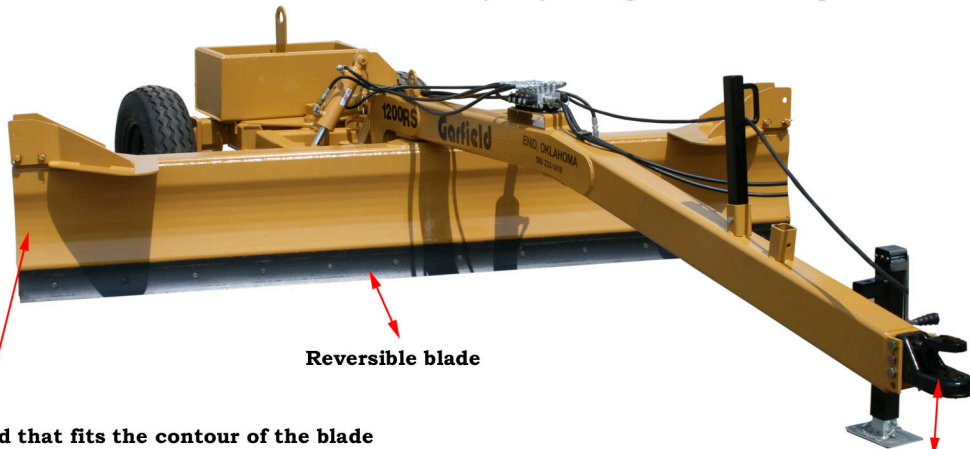

Reversible blade

Formed moldboard that fits the contour of the blade

Height adjustable hitch

Model	Width	Angle	Height	Tilt	Ground Clearance	Tires	Weight	Length	HP Required
1200	12'	40°	24"	15°	17"	11L15	2800#	19' 6"	70-125
1000	10'	40°	24"	15°	17"	11L15	2612#	19' 6"	70-125